

WALL FINISHINGS (DRY AREA)					
Takeover requirement Flat and clean wall, with water-based sealer applied, or On existing tiles or On fiber cement / calcium silicate / gypsum boards					
Type	Thickness	Style	Minimum Area, m ²	Unit Rate, \$/sqm	
Lime Paint	NA	Traditional - Various Effects	50	70	
Lime Plaster	2-3mm	Traditional - Various Effects	20	145	
Tadelakt	4-5mm	Traditional - Tadelakt Effect	5	250	
Cement / Lime	2-3mm	Natural cement effect / colour	20	110	
Options add colorwashes					
			Included as per style requirements		
Included protection coat Natural soap, beewax					

FLOOR FINISHINGS (DRY AREA)				
Takeover requirement On self levelled cement (dry area only) On existing / new tiles (wet / dry area)				
Type	Thickness	Possible Styles	Minimum Area, m ²	Unit Rate, \$/sqm
Traditional Microcement	2-3mm	Natural to Distressed	20	175
Epoxy-based Microcement	2-3mm	Monotone	20	250
Microconcrete	6-8mm	Natural to Distressed	10	400
Options Add wine / acid proof treatment				
				20
Included protection coat Clear polyurethane				

SPECIALITY WORKS			
Material	Type	Minimum Area, m ²	Unit Rate, \$
Any	As countertops		lump sum
Any	On carpentry		lump sum
Any	On furnishings		lump sum
Any	On doors, frames		lump sum
Any	Other special works		lump sum
Protection coat As required			



Traditional Microcement + Colourwash



5mm Authentic Moroccan Tadelakt



Lime Plaster on ceiling and floor



Microconcrete Pool



Lime Paint + Colourwash

WALL FINISHINGS (WET AREA)					
Takeover requirement Flat and smooth cement, without sealer or On existing tiles or On fiber cement / calcium silicate boards					
Type	Thickness	Style	Minimum Area, m ²	Unit Rate, \$/sqm	
Lime Plaster	2-3mm	Traditional - Various Effects	20	Lump Sum	
Tadelakt	4-5mm	Traditional - Tadelakt Effect	5	Lump Sum	
Cement / Lime	2-3mm	Natural cement effect / colour	20	Lump Sum	
<i>Eg: For standard BTO toilet vertical surfaces only, with floor area not exceeding 2.0m x 1.8m and wall not exceeding 2.6m in height, \$3800/toilet, for 2-3mm lime plaster</i>					
Included protection coat Natural soap + hidro-repellent + natural wax					

FLOOR FINISHINGS (WET AREA)				
Takeover requirement On existing / new tiles only with appropriate water gradient On cement screed				
Type	Thickness	Style	Minimum Area, m ²	Lump Sum \$
Microconcrete	6mm	Polished - Natural	NA	From \$1000
Eg: For standard BTO toilet floor, with area not exceeding 3sqm, \$1500 per toilet for microconcrete				
Included protection coat Hidro-Oleo repellent				

CEILING FINISHINGS (WET / DRY AREA)					
Takeover requirement Flat and smooth cement, with/ without sealer or On fiber cement / calcium silicate boards					
Type	Thickness	Style	Minimum Area, m ²	Unit Rate, \$	
Lime Paint	NA	Traditional - Various Effects	10	95	
Lime Plaster	2-3mm	Traditional - Various Effects	10	175	
Tadelakt	4-5mm	Traditional - Tadelakt Effect	5	300	
Cement / Lime	2-3mm	Natural cement effect / colour	10	135	
Options add colorwashes					
			Included as per style requirements		
Protection coat Natural Soap					

Types of protective coats

Natural soap is a traditional material used to seal the our works. Soap and lime reacts to form an insoluble salt inside the material. It is not visible from outside. There is a mild, almost not noticeable colour enhancing effect and it retains the natural texture of our

Hidro Repellent is a modern material, silicone based, impregnator type of protection against water and commonly used in wet area, vertical surfaces. It is not visible from outside and retains natural look of material.

Natural wax is a traditional material used to protect surfaces against water. It is a film forming type of protection, has a mild sheen effect but still retains breathability to the material.

Polyurethane is a modern material used to seal our floors. It has a noticeable colour enhancing effect as it is a film forming polymer protection layer against abrasion.

Types of materials

Lime plaster is manufactured from limestone. It mainly contains sand, water and lime. There are many kinds of lime plaster and Aftertouch will select an mix the appropriate type to achieve the desired look. It is naturally mould resistant due to its high alkalinity. Lime plaster is commonly applied with a stainless steel trowel

Lime paint is a sub category of materials from lime plaster. It has all the properties of lime plaster. It is possible to modify the water content to achieve different effects. Lime paint is commonly applied by brush.

Tadelakt is a 100% natural lime plaster + sand mortar, with ZERO resins that originates from Morocco. Application is by stainless steel trowel, wooden float and polished stones. Aftertouch is a certified professional applicator of authentic Tadelakt.


Traditional Microcement mainly contains sand, white cement and acrylic resins. It is slightly harder than parquet and is porous without the polyurethane coat. It can be applied to virtually any surface but not recommended for wet area floors.

Epoxy based microcement mainly contains sand, minerals and epoxy resins. It is waterproof even without the polyurethane coat, has a superior hardness and can be used for commercial floor projects.

Microconcrete mainly contains bigger sands as aggregates, cement as binder and special resins as co-binder. It has recrystallisation properties to water ingress and can be used as a waterproof material. It is also chlorine and acid resistant, making it suitable for use in pools or places where permanent contact with water is expected.

AFTERTOUC

Sales Process

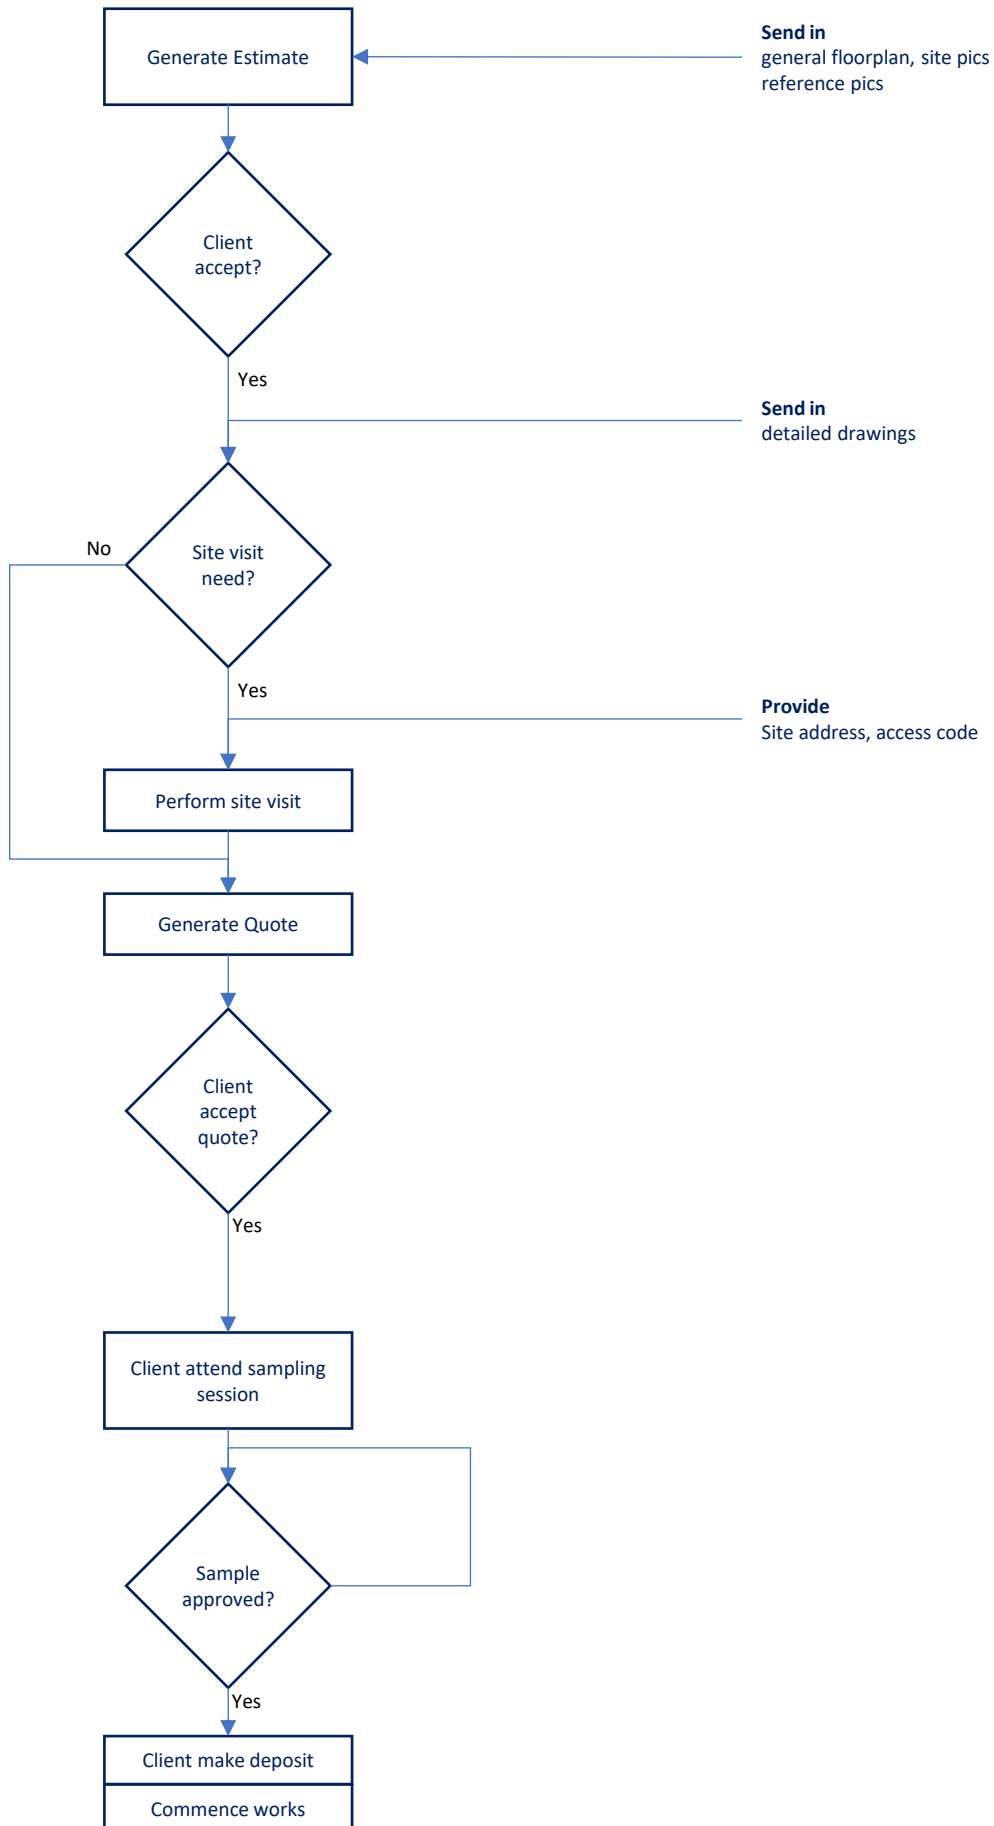

WELCOME
TO

AFTERTOUC



About us
Services
Maintenance

- 1) Microcement**
- 2) Lime plaster**
- 3) Limewash paint**
- 4) Tadelakt**
- 5) Microconcrete**

About us

Services

Maintenance

1) Microcement

TRADITIONAL

Is a blend of **cement, resins and sands**

For dry area horizontal surfaces

Overlay over existing tiles or self level cement

Can be made monotone or multi tone

About 2mm thick, finished with clear matt polyurethane



About us

Services

Maintenance

1) Microcement

SYNTHETIC

Is a blend of **resins, polymer fillers and sands**

For dry area horizontal surfaces

Overlay over existing tiles or self level cement

Only in monotone

About 2mm thick, finished with clear matt polyurethane



About us

Services

Maintenance

2) Lime Plaster


Traditional

Is a blend of **lime putty, sands and pozzolans**

For vertical surfaces, dry or wet, interior and exterior

Monotone to multi tone

About 2-5 mm thick, finished with natural soap and(or) water repelling agent, beewax

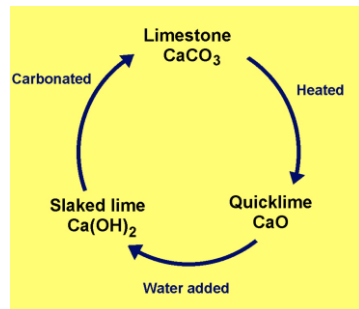

About us

Services

Maintenance

2) Lime Plaster


Modern

Is a blend of **lime putty, sands and resins**

For vertical surfaces, only dry interior areas

Monotone to multi tone

About 2-5 mm thick, finished with beewax

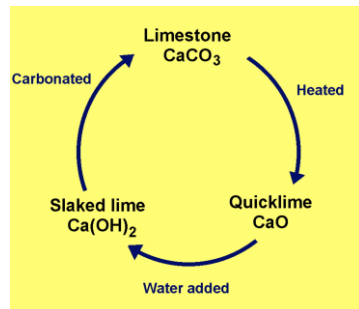

About us

Services


Maintenance

3) Limewash Paint

Is a blend of **lime putty, water, resins**

For non-floor surfaces, only dry interior areas
Monotone to multi tone

Negligible thickness, finished in beewax

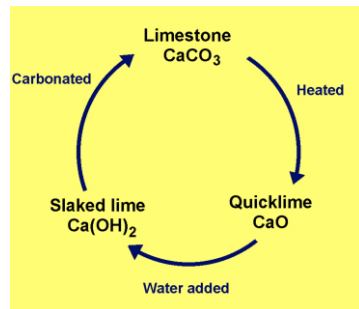

4) Tadelakt

Is a niche form of lime plaster from Morocco
Manufactured via traditional methods
Main difference is calcerous sands vs siliceous sands

For vertical surfaces in wet or dry area

About 5 mm thick, finished by
stoning and natural soap
and(or) water repelling agent, beewax

About us
Services
Maintenance



5) Microconcrete

Is a blend of **cement, sands, pozzolans and additives, resins**

For vertical or horizontal surfaces in wet or dry area, indoor or outdoor

Applied at about 8mm, polished to around 5mm

Finished either by water repelling agent or clear matt PU



About us

Services

Maintenance

Maintenance

For Microcement floors

For everyday maintenance, use

Non abrasive, neutral, non oxidizing, alcohol-free
detergents

Recommended to use enzyme based cleaners

For thorough clean, use degreasers and/or steam
cleaners

About us

Services

Maintenance

Maintenance

For Lime plaster bathroom walls

For everyday maintenance, use

Non abrasive, non acidic, non oxidizing, alcohol-free detergents to maintain alkalinity

Recommended to use enzyme based cleaners

To refresh water repellency

Use impregnating sealers for stone depending on actual performance

About us

Services

Maintenance

Maintenance

For Limewash paint

For everyday maintenance, use dry cloth.

May use damp cloth and wipe.

About us

Services

Maintenance

Maintenance

For Microconcrete

For everyday maintenance, use neutral pH detergent.

Can be scrubbed, polished.

Possible to use bleach or acid (keep it minimal)

About us

Services

Maintenance